

An ab-initio study of Stability Dependence on Structure of Zinc Oxide Nanowires

Satyendra Singh^{1}, Sanjay Prakash Kaushik², Ram-Krishna Thakur³*

Article history: Received: 26 October 2021 Accepted: 24 November 2021

Abstract

The performed study has explored structural dependence of stability for different proposed shapes for Zinc Oxide nanowires by using pseudopotentials DFT calculations. 2-atom linear, 2-atom zigzag, 4-atom square and 6-atom hexagonal nanowire are the four different shapes under consideration and the study has been performed by using ABINIT code. Our findings indicate that 2 atom zigzag shaped nanowire has shown greatest stability

Keywords: Density Function Theory, Density of State, Generalized Gradient Approximations, Nanowires, Zinc oxide.

Corresponding author

¹Department of Physics, Seth G. B. Podar College, Nawalgarh -333042, India, Email: satyendra7171@gmail.com

Authors

²Department of Physics, DIET Machhrawli Jhajjar-124108, India

³Director, Research and Academic Affairs, Jaipur National University Jaipur-302017, India

1. Introduction

The present era is era of technological advancement and the world of nano dimension has played a critical role in reaching to this high level of comfort. The nanowires and the study of their electrical behaviour have come out to be an area of interest for the young researchers and the study of last 20 to 30 years are enough to show this trend. A strong deviation of properties is seen when we travel towards the smaller dimension. When the sizes of the materials are reduced to molecular dimensions they can develop exotic properties. The devices which are made from nanowires have strong dominance over the devices based on photolithography. The present work deals implication of the local density approximation to study the

stability dependence on structure for zinc oxide nanowires which has significant technical importance.

Various researchers have already sufficiently explored the silicon and germanium nanowires in theoretical as well as experimental manner [1-3]. ZnO has a wide band gap with many interesting electronic and optical properties and comes from the family of II-VI group. ZnO is used in optoelectronics and sensors [4-5]. ZnO has unique importance because of being the building blocks for coming futures. It is also used in logic circuits [6] and nanogenerators [7-8].

A lot of work has already been reported regarding synthesis of ZnO nanowire. Qing et al.[9] achieved successful synthesis of zinc oxide nanowire and fabricated gas sensors based on these nanowires. Highly densed zinc oxide nanowire array were successfully synthesized by direct oxidation of zinc substrate by Ren et al.[10]. ZnO nanowire arrays were synthesized directly on zinc foil by G. Tandra et al.[11] by using simple thermal evaporation process at critically low temperature. High purity single crystal ZnO nanowires were successfully synthesized by L. Chih and L. Yuan in 2009 by using thermal decomposition of zinc acetate dehydrates at 300 C without a catalyst [12]. Lupan O. et al.[13] synthesized and characterized the ZnO nanowires based nanosensors and highlighted their applications. Zinc oxide Nanowires with various morphologies were synthesized by the hydrothermal method on silicon substrate coated with zinc oxide thin films by Bai S. and Wu S in 2011[14]. K. Chen et al. [15] synthesized ZnO nanostructures via hydrothermal method by using mixed solution of zinc chloride and HMTA as the precursor. Li X. et al. [16] prepared zinc oxide nanowires through reutilization of sludge from soy sauce waste water electrochemical treatment by using hydrothermal process. Zinc oxide nanowire arrays were synthesized on ZnOTiO₂ mixed oxide seeded FTO conducting glass plate by Marimuthu T et al. [17] in 2016 by using two step sol-gel and hydrothermal method. Zinc oxide nanowires were grown on graphene foam with the help of hydrothermal synthesis by Yan H et al. [18] in 2017. Chen X. et al. [19] performed the IN-situ growth of zinc oxide nanowires over a sensing electrode by using facile hydrothermal route. The demonstration of rational synthesis of mono dispersed sized zinc oxide nanowires was performed by Zhao X et al. [20] in 2019. Successful synthesis for Zinc oxide nanofoam cluster was performed on zinc oxide nanowires using SiO₂/Si substrate by Chowdhary P. et al. [21].

The presented article explores the structural dependence of stability of zinc oxide nanowires for four different shapes 2-atom linear shaped nanowire, 2-atom zigzag shaped nanowire, 4-atom squared nanowire & six atom hexagonal nanowire, which has not been explored by any researchers in their reported work so far.


2. Computational Details

The structure of zinc oxide nanowires were investigated within the plane wave pseudopotential method by using ab-initio density functional theory calculations [22, 23]. The technique of pseudopotential has proven to be extremely useful for studying structural properties of various materials [24]. We have used ABINIT code for the proposed study [25]. The exchange correlation function of Perdew et al. [26] and generalized gradient approximation have been useful for the performed task. Troullier & Martins [27] exchange correlation has also been useful for the calculations. We received the required pseudopotential from ABINIT webpage itself. The calculations were initially applied on bulk zinc oxide material in order to test the potentials and the results so obtained were seen to be in close agreement with the already available experimental results. The calculations were done by adopting a very self consistent manner approach. The optimization of zinc oxide structure has been performed for Hellmann-Feynman forces with a small value 10^{-3} eV/Å on each atom. The cut off energy has been considered as 30 Hartree for the performed calculations. The super cell of side 20 a.u. along XY directions were considered for positioning of nanowire. The Z axis is considered as the axis of wire and periodic boundary conditions were duly applied.


The 15k - points sampling for integration of Brillouin zone along z direction has been performed by using the Monkhorst-pack technique [28]. No constraints were imposed in order to obtain relaxation of atoms. The optimized value of lattice parameter for bulk Zinc oxide has been obtained. All the four structures are optimized to unless the lowest energy was reached.

3. Results and Discussion


The paper covers the study of four completely different geometric structures for ZnO nanowires. The details concerned to proposed structures have been explored significantly in our already published work [29-39]. The various proposed structures of ZnO nanowires have been shown in Figure 1.

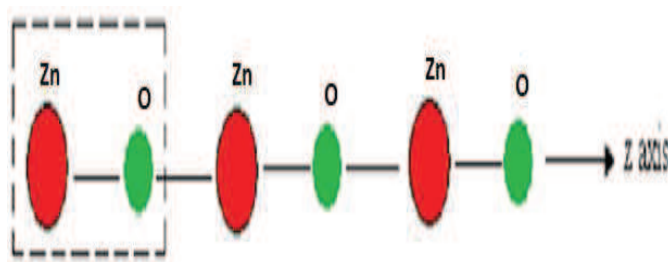


(a) 2-atom Linear Nanowire

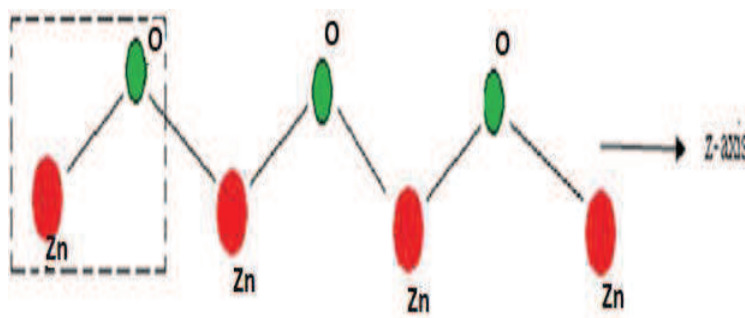

(b) 2-atom Zigzag Nanowire

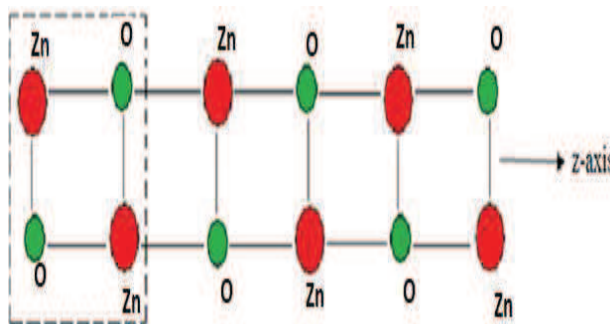

(c) 4-atom Square Nanowire

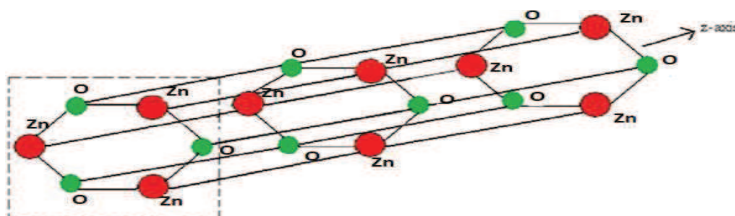

(d) 6-atom Hexagonal Nanowire

FIGURE 1. Structures of Nanowires (a) 2-atom Linear Nanowire (b) 2-atom Zigzag Nanowire (c) 4-atom Square Nanowire (d) 6-atom Hexagonal Nanowire.

In order to obtain the greatest stability of the various structures of zinc oxide nanowires, the primary condition is to get the configuration corresponding to maximum stability and least energy for the proposed structures. The energy variation with inter atomic distance for all geometries are mentioned in Table 1-4

and the corresponding distance for minimum energy has been highlighted in the table. Table 5 is indicating the optimized energy and corresponding distance. the independent optimization of all structural parameters was performed for each structure to achieve configuration corresponding to the least energy. The calculation of energy has been performed, for infinite linear wire, as a function of $x = 'a'$, where 'a' is the zinc oxygen distance up to 0.01 nm and then the effective total energy is determined. The 2-atom linear nanowire shows the least energy at a distance of 0.64 nm with energy value of -1056.56 eV where as the 2-atom zigzag nanowire shows least energy of -1058.29 eV at 0.22 nm distance, i.e.. the zigzag nanowire has lower energy as compared to a linear nanowire. For 4-atom squared nanowire, the energy is least at 0.22 nm with value of -1057.89 eV. Minimum energy configuration for 6-atom hexagonal nanowire predicts another time the inter atomic distance of 0.22 nm but its total energy is found to be -1050.37 eV. The overall findings of study shows that 2-atom zigzag nanowire has the least energy and maximum stability as compared to other structures under study The graphs showing the variation between distance & energy, for all the structures, have been shown in Figure 2 to Figure 5.

Table 1. Variation of energy (eV/atom) with Interatomic distance x (nm) for 2 atom linear nanowire shape of ZnO

X (nm)	Total Energy (eV/atom)
0.06	-829.87
0.10	-1044.34
0.16	-1052.75
0.22	-1054.76
0.26	-1055.18
0.32	-1037.29
0.38	-1053.18
0.42	-1030.61
0.48	-1029.48
0.52	-995.60

0.58	-1019.83
0.64	-1056.56
0.68	-1054.96
0.74	-1042.52
0.80	-1047.33

2 Atom Linear Nanowire

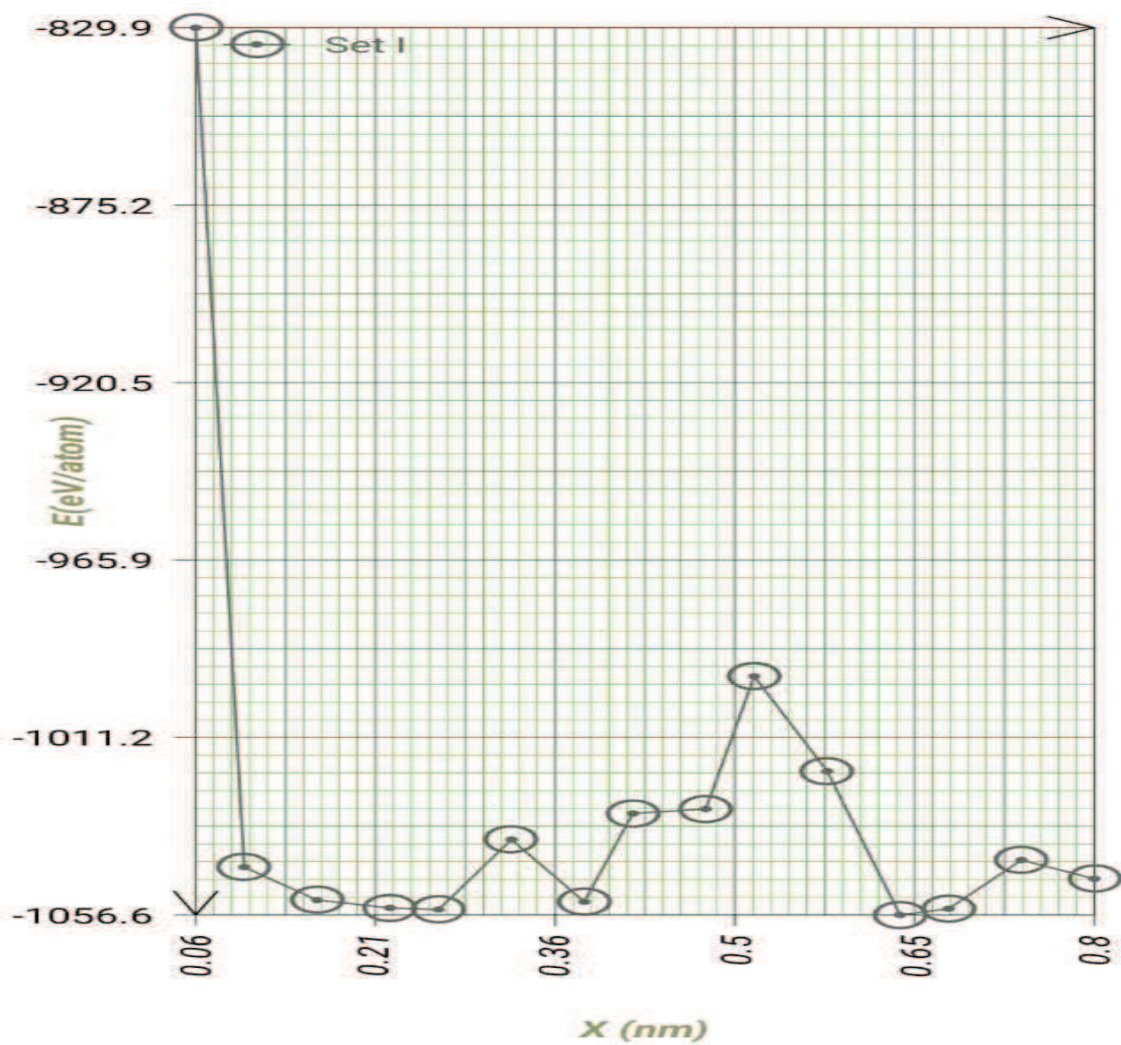


FIGURE 2. The variation between distance and energy for 2 atom linear nanowire

Table 2. Variation of energy (eV/atom) with Interatomic distance x (nm) for 2 atom Zigzag nanowire shape of ZnO

X (nm)	Total Energy (eV/atom)
0.06	-787.13
0.10	-1020.18
0.16	-1053.06
0.22	-1058.29
0.26	-1053.81
0.32	-1057.33
0.38	-1055.76
0.42	-1057.24
0.48	-1056.85
0.52	-1048.98
0.58	-1055.58
0.64	-1027.27
0.68	-1052.53
0.74	-1050.56
0.80	-1056.49

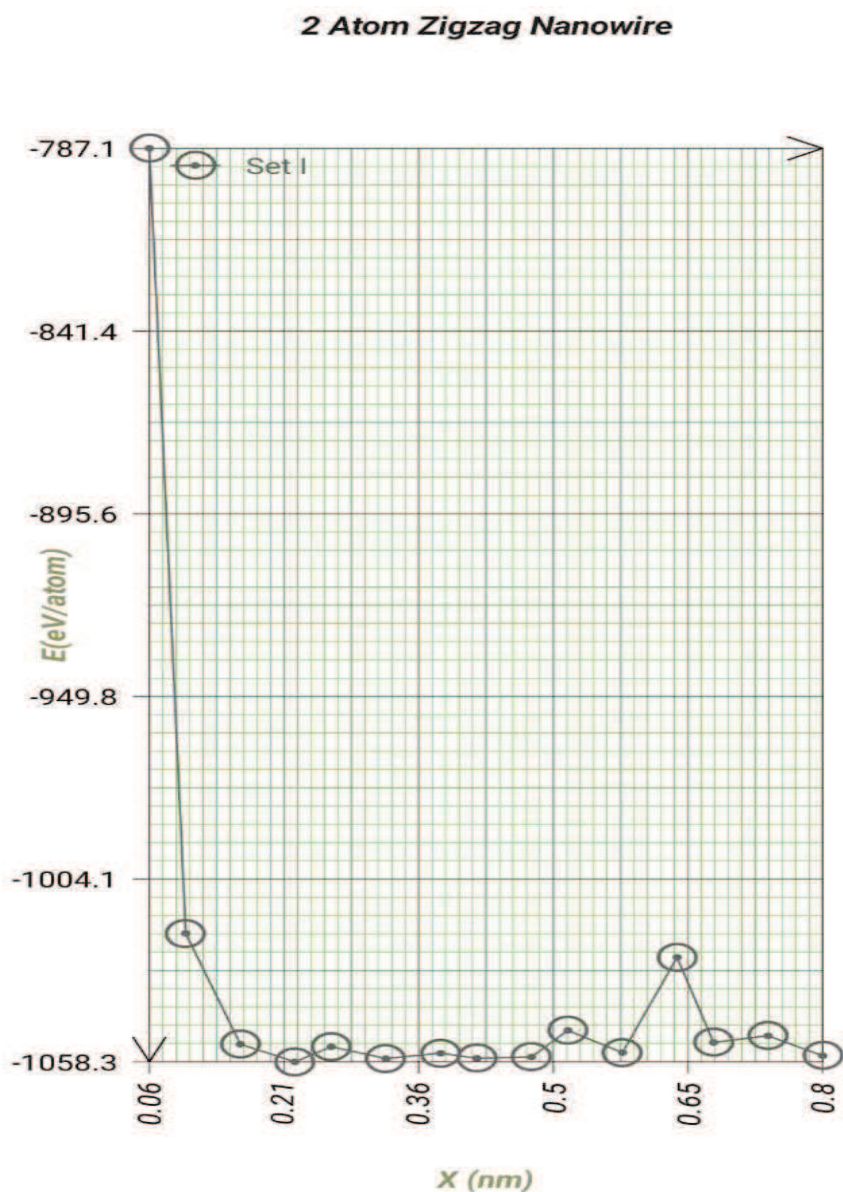


FIGURE 3. The variation between distance and energy for 2 atom Zigzag nanowire

Table 3. Variation of energy (eV/atom) with Interatomic distance x (nm) for 4 atom square nanowire shape of ZnO.

X (nm)	Total Energy (eV/atom)
0.06	-244.19
0.10	-1013.91

0.16	-1056.99
0.22	-1057.89
0.26	-1052.96
0.32	-1053.21
0.38	-1054.53
0.42	-1055.99
0.48	-1050.01
0.52	-1042.65
0.58	-1055.45
0.64	-1055.38
0.68	-1056.27
0.74	-1047.78
0.80	-1057.04

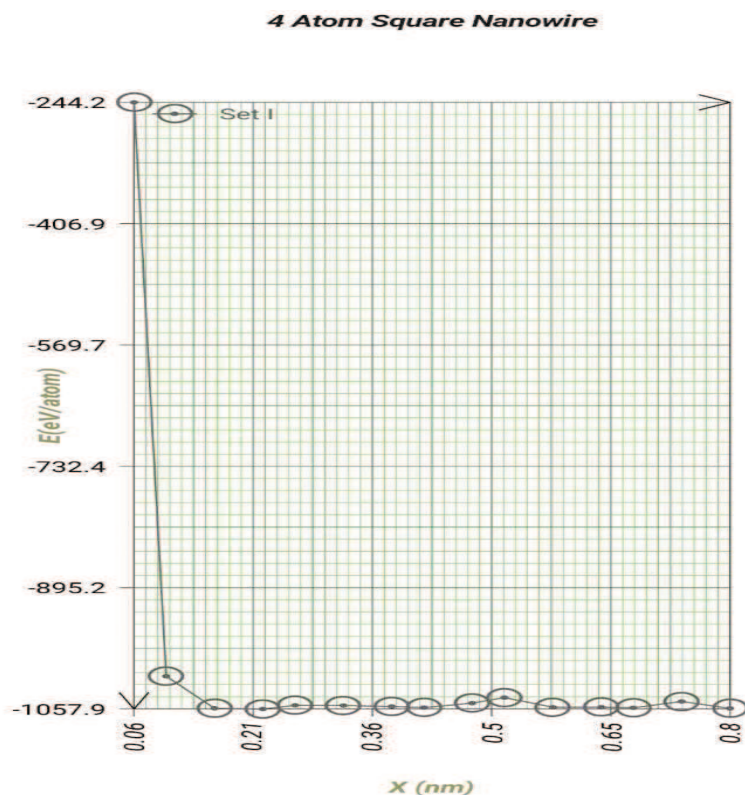


FIGURE 4. The variation between distance and energy for 4 atom square nanowire.

Table 4. Variation of energy (eV/atom) with Interatomic distance x (nm) for 6 atom hexagonal nanowire shape of ZnO

X (nm)	Total Energy (eV/atom)
0.06	-159.88
0.10	-921.81
0.16	-1024.95
0.22	-1050.37
0.26	-1042.78
0.32	-993.76
0.38	-1037.96

0.42	-1037.18
0.48	-1006.86
0.52	-1041.60
0.58	-1047.54
0.64	-1034.06
0.68	-941.69
0.74	-865.61
0.80	-1044.49

6 Atom Hexagonal Nanowire

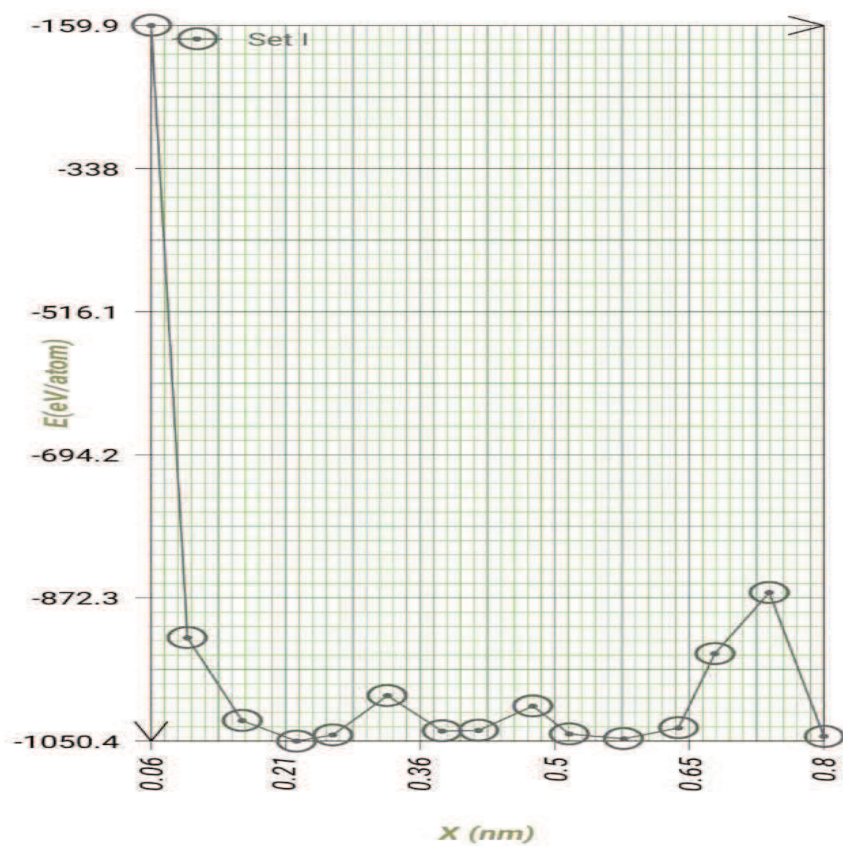


FIGURE 5. The variation between distance and energy for 6 atom hexagonal nanowire

Table 5. The interatomic distances and Total energy of Optimized Structures

Structure	Zn-O Distance (nm)	Zn-Zn Distance (nm)	Total Energy(eV/atom)
2 atom Linear	0.64	1.28	-1056.56
2 atom Zigzag	0.22	0.44	-1058.29
4 atom Square	0.22	0.44	-1057.89
6 atom Hexagonal	0.22	0.44	-1050.37

4. Conclusion

The study has performed plane wave pseudopotential DFT calculations for four different structures of Zinc oxide nanowires by using ABINIT code. Our study has reflected that 2- atom zigzag shape has come out to be more stable as compared to other shapes under consideration.

Acknowledgements

We express our gratitude Seth G. B. Podar College, Nawalgarh (Rajasthan), District Institute of Education and Training, Jhajjar (Haryana) for providing the facilities for Computational work

Declaration of Conflict of Interest

The authors declared no potential conflicts of interest with respect to the research, authorship, and/or publication of this article.

Funding

The author received no financial support for the research, authorship, and/or publication of this article.

References:

1. LiD., Wu Y., Philip K., Li S., Yang P. & Majumdar A., (2003), Thermal Conductivity of individual silicon nanowires, *Applied Physics Letter*, 83 (14), 2934-2936.
2. Tian B., Zheng X., Kempa T. J., Fang Y., Yu N., Yu G., Huang J. & Charles M.L., (2007), Coaxial silicon nanowires as solar cells and nanoelectronic power sources, *Nature*, 449(7164), 885-889.
3. Andrew B.G., Lincoln J.L., Mark S. G., and Charles M. L., (2004), Growth and transport properties of complementary germanium nanowire field-effect transistors, *Applied Physics Letter*, 84(21), 4176-4178.
4. S.C. Minne, S. R. Manalis and C.F. Quate, (1995), Parallel atomic force microscopy using cantilevers with integrated piezoresistive sensors and integrated piezoelectric actuators, *Applied Physics Letters*, 67, 3918.
5. C.R. Gorla, N.W. Emanetoglu and S. Liang, (1999), Structural, optical and surface acoustic wave properties of epitaxial ZnO films grown on (011) sapphire by metallorganic chemical vapour deposition, *Journal of Applied Physics*, 85, 2595.
6. M.S. Gudiksen, L.J. Lauhan, J. Wang, D.C. Smith and C.M. Lieber, (2002), Growth of nanowire superlattice structures for nanoscale photonics and electronics, *Nature*, 415, 617.
7. Z. L. Wang and J. Song, (2006), Piezoelectric Nanogenerators based on Zinc Oxide Nanowire Array, *Science*, 312, 242.
8. P. X. Gao, J.H. Song, J. Liu and Wang, (2007), Nanowire Piezoelectric Nanogenerators on Plastic Substrate as Flexible Power Source for Nanodevices, *Adv. Mater*, 19, 67.
9. Qing Wan, Q.H. Li, Y.J. Chen, T.H. Wang X.L. He, J.P. Li and C.L. Lin, (2004), Fabrication and ethanol sensing characteristics of ZnO nanowire gas sensors, *Applied Physics Letters*, 84(18), 3654-3656.
10. S. Ren, Y.F. Bai, J. Chen, S.Z. Deng, N. S. Xu, Q.B. Wu and S. Yang, (2007), Catalyst free synthesis of ZnO nanowire array on zinc substrate by low temperature thermal oxidation, *Material Letters*, 61(3), 666-670.
11. Ghoshal T., Biswas S., Kar S., Dev A., Chakrabarti S. and Chaudhuri S., (2008), Direct synthesis of ZnO nanowire arrays on Zn foil by a simple thermal evaporation process, *Nanotechnology*, 19(6), 065606.
12. Lin C. and Li Y., (2009), Synthesis of ZnO nanowire by thermal decomposition of zinc acetate dehydrate, *Material Chemistry and Physics*, 113(1), 334-337.
13. Lupan O, Emelchenko G.A., Uraski V.V., Reskin A.N., Gruzintsev A.N., Tiginyanu I.M., Chow L., Ono L.K., Cuenya B.R., Heinrich H. and Yakimov

- E.E., (2010), Synthesis and characterization of ZnO nanowires for nanosensor applications, *Material Research Bulletin*, 45(8), 1026-1032.
14. Bai S.N. and Wu S.C, (2011), Synthesis of ZnO nanowires by the hydrothermal method, using sol-gel prepared ZnO seed films, *Journal of Material Science: Materials in Electronics*, 22(4), 339-344.
 15. Kao C.Y., Hsin C.L., Huang C.W., Yu. S.Y., Wang C.W., Yeh P.H. and Wu W.W., (2012), Highyield synthesis of ZnO nanowire arrays and their optoelectrical properties , *Nanoscale*, 4(5), 1476-1480.
 16. Li X., Zhang F., MaC., Elingarami S. and He N., (2013), Preparation of ZnO nanowire using sludge from wastewater treatment, *Journal of Nanoscience and Nanotechnology*, 13(8), 5859-5863.
 17. Marimuthu T., Anandhan N., Thangamuthu R., Mummorthi M and Ravi G., (2016), Synthesis of ZnO nanowire arrays on ZnOTiO₂ mixed oxide seed layer for dye sensitized solar cell applications, *Journal of Alloys and Compounds*, 677, 211-218.
 18. Yue H.Y., Zhang H. Huang S., Lin X.Y., Gao X., Chang J., Yao L.H. and Guo E.J., (2017), Synthesis of ZnO nanowire array/3D grapheme foam and application for determination of levodopa in the presence of uric acid, *Biosensors and Bioelectronics*, 89, 592-597.
 19. Chen X., Shen Y., Zhang W., Zhang J., Wei D., Lu R., Zhu L., Li H. and Shen Y., (2018), In-situ growth of ZnO nanowire Arrays on the sensing electrode via a facile hydrothermal route for high performance NO₂ Sensors, *Applied Surface Science*, 435, 1096-1104.
 20. Zhao X., Nagashima K., Zhang G., Hosomi T., Yoshida H., Akihiro Y., Kanai M., Mizukami W., Zhu Z., Takahashi T., Suzuki M., Samransuksamer B., Meng G., Yasui T., Aoki Y., Baba Y. and Yanagida T., (2019), Synthesis of monodispersely sized ZnO nanowire from randomly sized seeds, *Nano Letters*, 20(1), 599-605.
 21. Chowdhury P., Roy S., Banerjee N., Dutta K., Gangopadhyay U. and Biswas U., (2020), Facile synthesis of ZnO nanofoam on ZnO nanowire for hydrogen gas detection, *Nanoscience & Nanotechnology*, 10(1), 86-92.
 22. Hohenberg P. and Kohn W., (1964), Inhomogeneous Electron Gas, *Physical Review B*, 136, 864-866.
 23. Kohn W. and Sham L. J., (1965), Self-Consistent Equations Including Exchange and Correlation Effects, *Physical Review A*, 140 (4A), A1133-A1138.
 24. Martin R.M., *Electronic Structure*, (2009), Cambridge University Press, Cambridge.

25. Gonze X., Beuken J. M., Caracas R., Detraux F., Fuchs M., Rignanese G. M., Sindic L., Verstraete M., Zerah G., Jollet F., Torrent M., Roy A., Mikami M., Ghosez P., Raty J. Y. and Allan D. C., (2002), First-principles computation of material properties: the ABINIT software project, *Computational Material Science*, 25, 478.
26. Perdew J. P., Burke K. and Ernzerhof M., (1996), Generalized Gradient Approximation Made Simple, *Physical Review Letter*, 77(18), 3865-3868.
27. Troullier N. and Martins J. L., (1991), Efficient pseudopotentials for plane-wave calculations, *Physical Review B*, 43(3), 1993-2006.
28. Monkhorstand H. J., Pack J. D., (1976), Special points for Brillouin-zone integrations, *Physical Review B*, 13(12), 5188-5192.
29. Srivastava P., Singh S. and Mishra A., (2008), Stability and Electronic Properties of GaN Nanowires - An *Ab-Initio* Approach, *Journal of Computational & Theoretical Nanoscience*, 5(4), 635-638.
30. Srivastava P. and Singh S., (2008), Linear & Second-order optical response of different GaN Nanowires, *Physica – E*, 40 (8), 2742-2746.
31. Singh S., Srivastava P. and Mishra A., (2009), Ab-initio study of Gallium Arsenide Nanowires, *Journal of Computational & Theoretical Nanoscience*, 6(7), 1556-1560.
32. Singh S. S, Srivastava P. and Mishra A., (2009), Structural Stability and Electronic Properties of GaSb nanowires, *Physica-E*, 42(1), 46-50.
33. Srivastava P., Singh S. and Mishra A., (2011), Electronic Properties of GaP Nanowires of Different Shapes, *Journal of Nanoscience and Nanotechnology*, 11(12), 10464-10469.
34. Srivastava P. and Singh S., (2011), Stability Analysis of AlN Nanowire, *Journal of Computational & Theoretical Nanoscience*, 8 (9), 1764-1768.
35. Singh S. and Srivastava P., (2013), Optical properties of gallium phosphide (GaP) Nanowires, *Applied Nanoscience*, 3 (2), 89-94.
36. Singh S. and Srivastava P., (2015), Linear and Nonlinear optical properties of GaAs Nanowires, *Applied Nanoscience*, 5 (3), 273-279.
37. Singh S., Kaushik S.P. & Supreet, (2020), Ab initio Study of Electronic Properties of Cadmium Sulphide Nanowires, *J. Comput. Theor. Nanosci*, 17(2/3), 546-551.
38. Kaushik S.P., Singh S. and Thakur R-K., (2020), Stability and electronic properties of ZnSe Nanowires: An ab initio Approach, *Nanosystems: Phys. Chem. Math.*, 11(5), 546-552.

39. Kaushik S.P., Singh S. and Thakur R.K., (2020), First Principles Study of Structural Stability and Electronic Properties of CdTe Nanowires, *Journal of Computational & Theoretical Nanoscience*, 17(12), 5210-5214